


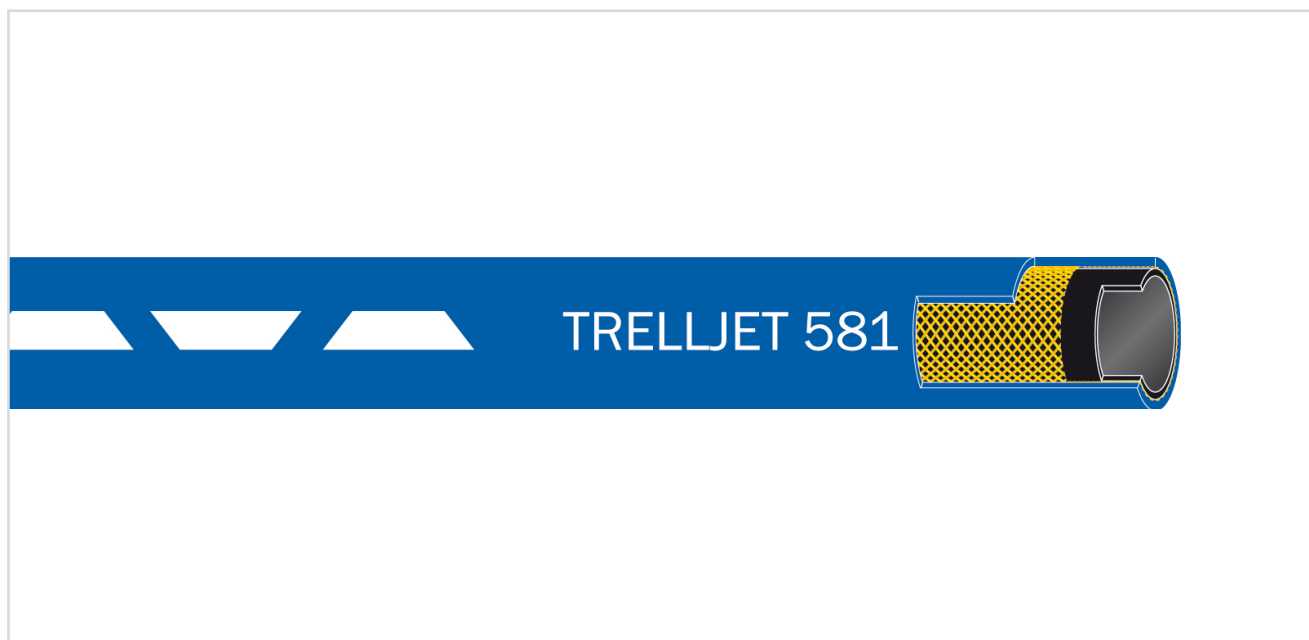

TRELLJET 581

Spolslang för industriell och professionell användning där hög säkerhet och varaktigt användande är nödvändigt. Lämplig för mobila och fasta installationer. Även lämplig för montage i slangupprullare. Speciellt framtagna för högtryckstvätt inom industrin.

Egenskaper

- Icke-svärtande
- Tål olja och tvättmedel
- Nötnings- och väderbeständig
- Tål hög värme
- Hög flexibilitet
- Kinkar ej

Teknisk beskrivning

- Innertub: NBR/SBR (svart, slät)
- Armering: Stål, ett flätlager
- Yttergummi: SBR/NBR (blått, slätt)
- Temperaturområde: -40°C till +150°C



TRELLJET 581

Specially designed for professional and industrial high pressure cleaning. Efficient for machines, vehicles, floors, public areas, facades, etc. Suitable for mobile pressure washers, fixed installations and reel mounted applications.

Advantages

- Non-staining smooth cover
- Oil and detergent resistant
- Wear and weather resistant
- High temperature resistance
- Light weight, flexible and kink resistant
- Long service life

Technical description

- Inner tube: NBR/SBR (black, smooth)
- Reinforcement: Steel, one braid
- Cover: SBR/NBR (blue, smooth)
- Temperature range: -40°C to +150°C

TRELLJET 581



	5-2861010	5-2861015	5-2861020	5-2861025	5-2861030
	1/4"				
	6,4 mm (1/4")				
	11,7 mm				
	400 bar				
	-40°C – +150°C				
	0,2 kg/m				
	50 mm				
	10 m	15 m	20 m	25 m	30 m
	5-2861040	5-2861050	5-2861060	5-2861100	
	1/4"				
	6,4 mm (1/4")				
	11,7 mm				
	400 bar				
	-40°C – +150°C				
	0,2 kg/m				
	50 mm				
	40 m	50 m	60 m	100 m	
	5-2861510	5-2861515	5-2861520	5-2861525	5-2861530
	1/4"				
	7,9 mm (5/16")				
	13,4 mm				
	400 bar				
	-40°C – +150°C				
	0,2 kg/m				
	60 mm				
	10 m	15 m	20 m	25 m	30 m



Anslutning
Connection



Innerdiameter
Inner diameter



Ytterdiameter
Outer diameter



Max arbetstryck
Max. working pressure



Temperaturområde
Temperature working area



Vikt
Weight



Böjningsradie
Bending radius



Leveranslängd
Delivery length



Övrig information
Other information

TRELLJET 581



	5-2861535	5-2861550	5-2861560	5-2861600	
	1/4"				
	7,9 mm (5/16")				
	13,4 mm				
	400 bar				
	-40°C – +150°C				
	0,2 kg/m				
	60 mm				
	35 m	50 m	60 m	100 m	
	5-2862015	5-2862020	5-2862025	5-2862030	5-2862040
	3/8"				
	9,5 mm (3/8")				
	15,5 mm				
	400 bar				
	-40°C – +150°C				
	0,2 kg/m				
	70 mm				
	15 m	20 m	25 m	30 m	40 m
	5-2862050	5-2862060	5-2862070	5-2862080	5-2862100
	3/8"				
	9,5 mm (3/8")				
	15,5 mm				
	400 bar				
	-40°C – +150°C				
	0,2 kg/m				
	70 mm				
	50 m	60 m	70 m	80 m	100 m

 Anslutning
Connection

 Innerdiameter
Inner diameter

 Ytterdiameter
Outer diameter

 Max arbetstryck
Max. working pressure

 Temperaturområde
Temperature working area

 Vikt
Weight

 Böjningsradie
Bending radius

 Leveranslängd
Delivery length

 Övrig information
Other information

TRELLJET 581



	5-2863050	5-2863080	5-2863100
	1/2"		
	12,7 mm (1/2")		
	18,7 mm		
	350 bar		
	-40°C – +150°C		
	0,3 kg/m		
	80 mm		
	50 m	80 m	100 m



Anslutning
Connection



Innerdiameter
Inner diameter



Ytterdiameter
Outer diameter



Max arbetstryck
Max. working pressure



Temperaturområde
Temperature working area



Vikt
Weight



Böjningsradie
Bending radius



Leveranslängd
Delivery length



Övrig information
Other information